

Konnecter Pro スマートキーボード

USB-C ベース充電モデル

取扱説明書

NovaPlus+
Made in Taiwan | 台湾製造

製品概要

本製品は、iPadに装着するだけでタイピングが可能になるキーボードーケースです。
18Wの急速充電に対応しており、iPadを使用しながら同時に充電することができます。
また本製品には海洋リサイクル素材を60%使用しており、環境にも配慮した設計となっています。

同梱物

キーボード本体 ×1
iPad用カバーケース× 1
スマート保護カバー× 1
取扱説明書・保証書（本書）× 1

主な仕様


動作電圧：5V
動作温度：-20~50℃
充電出力：18W PD対応
外形寸法：横 250 × 縦 186 × 厚さ 19.4[5]
（ JC27Pは厚さ 17[5] ）



はじめに


まずは、Konnecter ProをiPadに取り付けます。


1 iPad用カバーケースにお手持ちのiPadをはめ込みます。


2


3 iPadのUSBポートにカバーケース付属のType-Cポートカバーを差し込みます。

注）ケースを取り外す時は、必ずType-Cポートカバーを先に抜いてください。


4 キーボードを接続します。

注）この時、マグネット接点が5対5で正しく合っていることを確認してください。


5

設定方法

iPadの設定を開き、
以下の順序で選択してください。
「設定」>「一般」>「キーボード」>「ハードウェアキーボード」>「キーボードの種類」>「JIS（日本）」

設定が完了すると、日本語ローマ字入力モードで次の操作ができるようになります。
・「英数」キーを押すと英語入力に切り替わり、キーボードに印字されている英数字や記号をそのまま入力できます。
・「かな」キーを押すと日本語入力（ローマ字入力）に戻ります。

重要な注意事項

1. マグネット接点の位置確認
ご使用前に、iPad側とKonnecter Pro側のマグネット接点（5つの金属端子）が、5対5で正しく位置合わせされ、接触していることをご確認ください。
接点がずれていると、本製品が正常に認識されない場合があります。

2. Type-Cポートカバーについて
ケースを取り外す際は、必ず先にType-Cコネクターを取り外してください。Type-Cコネクターを接続したままケースを取り外すと、コネクターに負荷がかかり、破損の原因となるおそれがあります。また、Type-Cコネクターを取り外す際は、回転させたり、斜め方向へ力を加えたり、強く引っ張ったりせず、まっすぐゆっくり引き抜いてください。

3. 充電器・USBケーブルについて
本製品を経由してiPadを充電する場合は、Apple純正の充電器およびUSB-Cケーブル、または同等仕様の製品のご使用を推奨します。
適合しない充電器やUSB-Cケーブルを使用すると、充電が不安定になったり、正常に充電できない場合があります。

4. キーボード、トラックパッドが反応しない場合
キーボード、トラックパッドが反応しない場合は、次の点をご確認ください。
・マグネット接点が正しく接触しているか
・接点部分に汚れや異物がないか
・iPadの設定に問題はないか
・トラックパッドキーが誤って押して有効になっていないか

上記を確認しても改善しない場合は、Konnecter Proを取り外し、再度正しく装着しなおしてください。
必要に応じてiPadを再起動してください。

キーボード

キーボードレイアウト



操作をキャンセル	前の曲に戻す
輝度を上げる	再生/一時停止
輝度を下げる	次の曲に進む
押す:音声入力　長押し:Siriを起動	ミュート
検索	音量を下げる
キーボード輝度調整（3段階）	音量を上げる
トラックパッドをオン/オフにする	画面ロック

主なショートカットキー

- + コントロールセンターを開く/閉じる
- + 入力言語を切り替える
- + 全て選択
- + 切り取り
- + コピー
- + 貼り付け
- + 3 スクリーンショット

インジケーター

CapsLock：大文字入力時は点灯、小文字時は消灯

トラックパッドジェスチャー

1本指操作	クリック 1本指で軽く押してクリックします	長押し 1本指で押し続けます	
	ドラッグ 項目を長押しした まま指をスライドさせて移動させます	ホーム画面に戻る ポインターを画面の一番下まで動かし、クリックします	
	Dockを開く 1本指でポインターを画面下部へ移動させます	コントロールセンターを開く 右上のステータスアイコンを選択してクリックします	
	通知センターを開く 左上のステータスアイコンを選択してクリックします		
2本指操作	上下にスクロール 2本指で上下にスワイプします。	左右にスクロール 2本指で左右にスワイプします	
	ズーム（ピンチイン/アウト） 2本指で開いたり、閉じたりします。	今日の表示を開く ホームまたは、ロック画面で、2本指で右にスワイプします	
	ホーム画面から検索を開く ホーム画面で2本指で下にスワイプします。		
3本指操作	ホーム画面に戻る 3本指で上にスワイプします	Appスイッチャーを開く 3本指で上にスワイプし、途中で止めてから指を離します	
	開いているAppを切り替える 3本指で左右にスワイプして、開いているAppを切り替えます		

保証書	Sunnylove Technology Company Limited
製品名：Konnecter Pro	型番：JC27 / JC27P
お客様・お名前・ご住所・TEL	
販売店名・住所・TEL	
ご購入日：　年　月　日	保証期間：ご購入日から 1年

・本保証は、正規販売店からの新品購入に限り適用されます。
・インターネット通販でご購入の場合は、ご購入日・販売サイト名・注文番号が確認できる納品書または購入履歴をご提示ください。

【保証規定】

1. 保証期間内に正常な使用状態でご使用の場合に限り品質を保証しております。万一保証期間内で故障がありました場合は、弊社所定の方法で無償修理いたしますので、保証書を製品に添えてお買い上げの販売店までお持ちください。
2. 次のような場合は保証期間内でも有償修理になります。
⑴保証書をご提示いただけない場合。
⑵所定の項目をご記入いただけない場合、あるいは字句を書き換えられた場合。
⑶故障の原因が取扱い上の不注意による場合。
⑷故障の原因がお客様による輸送・移動中の衝撃による場合。
⑸天変地異、ならびに公害や異常電圧その他の外部要因による故障及び損傷の場合。
⑹譲渡や中古販売、オークション、転売などでご購入された場合。
3. お客様ご自身による改造または修理があったと判断された場合は、保証期間内での修理もお受けいたしかねます。
4. 本製品の故障、またはその使用によって生じた直接、間接の損害については弊社はその責を負わないものとします。
5. 本製品を使用中に発生したデータやプログラムの消失、または破損についての補償はいたしかねます。
6. 本製品は医療機器、原子力設備や機器、航空宇宙機器、輸送設備や機器などの人命に関わる設備や機器、及び高度な信頼性を必要とする設備や機器やシステムなどへの組み込みや使用は意図されておりません。これらの用途に本製品を使用され、人身事故、社会的障害などが生じても弊社はいかなる責任も負いかねます。
7. 修理ご依頼品を郵送、またはご持参される場合の諸費用は、お客様のご負担となります。
8. 保証書は再発行いたしませんので、大切に保管してください。
9. 保証書は日本国内においてのみ有効です。

お問い合わせ　Sunnylove Technology Company Limited
〒533-0031 大阪市東淀川区西淡路1-3-1-36 新大阪ビル3F
www.novaplus.co.jp
Email | support@novaplus-tech.com
TEL | 06-6795-9951
受付時間 平日 10:00~17:00(土日祝除く)



Konnecter Pro
Smart Keyboard

USB-C Base Charging Model

User Manual

NovaPlus+
Made in Taiwan

Product Overview

This product is a keyboard case that allows you to start typing simply by attaching it to your iPad.

It supports 18W fast charging, allowing you to charge your iPad while using it.

This product is also made with 60% ocean-recycled materials and is designed with environmental sustainability in mind.

Package Contents

Keyboard × 1
iPad Cover Case × 1
Smart Protective Cover × 1
User Manual / Warranty Certificate × 1

Main Specifications

Operating Voltage: 5V
Operating Temperature: −20°C to 50°C
Charging Output: Supports 18W PD
Dimensions: W250 × H186 × D19.4 mm
JC27P Thickness: 17 mm




Important Precautions Before and During Use

1



Insert your iPad into the iPad cover case.

2




Slide the iPad into position as shown in the illustration.

3



Insert the Type-C port cover included with the cover case into the USB port on your iPad.

4



5



Installation is complete.

Setup Instructions

Open Settings on your iPad and select the following options in order:

Settings > General > Keyboard > Hardware Keyboard > Keyboard Type > JIS (Japan)

Once the setup is complete, you can use the following functions in Japanese Romaji input mode:

Press the Eisu (英数) key to switch to English input. You can then enter the letters, numbers, and symbols printed on the keyboard.
Press the Kana (かな) key to return to Japanese input in Romaji mode.

Important Precautions

1.Check the Magnetic Contact Alignment
Before use, make sure that the five metal magnetic contacts on the iPad are properly aligned with the five contacts on the Konnecter Pro.

2.Handling the Type-C Connector
Before removing the case, always disconnect the Type-C connector first.
Removing the case while the Type-C connector is still connected may put excessive stress on the connector and cause damage.
When disconnecting the Type-C connector, do not twist it, pull it at an angle, or use excessive force. Gently pull the connector straight out.

3.Charger and USB-C Cable
When charging your iPad through this product, we recommend using an Apple original charger and USB-C cable, or products with equivalent specifications.
Using an incompatible charger or USB-C cable may result in unstable charging or prevent the iPad from charging properly.

4.If the Keyboard or Trackpad Does Not Respond
If the keyboard or trackpad does not respond, please check the following:

・Make sure the magnetic contacts are properly aligned and connected.
・Make sure there is no dirt, dust, or foreign material on the contacts.
・Check that the iPad settings are configured correctly.
・Make sure the trackpad lock key has not been accidentally activated.

If the issue persists after checking the above, remove the Konnecter Proo and attach it again correctly.

Restart the iPad if necessary.

Keyboard

Keyboard Layout



Cancel the current operation	Return to the previous track
Increase screen brightness	Play or pause media
Decrease screen brightness	Skip to the next track
Tap to speak; hold for Siri	Mute the sound
Open Search	Decrease the volume
3 levels	Increase the volume
Turn the trackpad on or off	Lock the screen


Main Shortcut Keys

- + C Open or close Control Center
- + Switch the input language
- + A Select all
- + X Cut
- + C Copy
- + V Paste
- + 3 Take a screenshot

Indicator

Caps Lock: On for uppercase; off for lowercase.

Trackpad Gestures

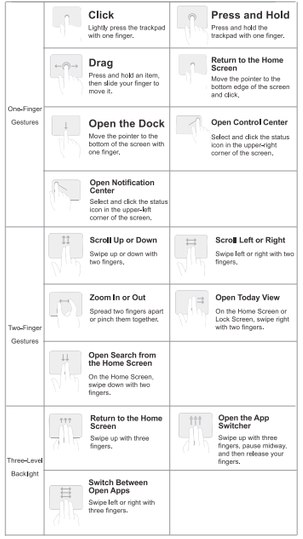

Warranty Certificate	Sunnylove Technology Company Limited
Product Name:**Konnecter Pro**	Model:**JC27/JC27P**
Customer Name / Address / TEL :	
Retailer Name / Address / TEL :	
Purchase Date: ____ / ____ / ____ (YYYY / MM / DD)	Warranty Period: 1 Year

・This warranty applies to new products purchased from authorized retailers.
・For online purchases, provide proof of purchase showing the purchase date, retailer, and order number.

【Warranty Terms】

1.This product is covered against defects under normal use during the warranty period. Eligible repairs will be provided free of charge upon presentation of the product and warranty certificate.
2.Repair charges may apply if:
(1) The warranty certificate is not presented.
(2) Required information is incomplete or altered.
(3) Damage is caused by misuse or negligence.
(4) Damage occurs during transportation or relocation.
(5) Damage is caused by natural disasters, abnormal voltage, pollution, or other external factors.
(6) The product was purchased secondhand, through resale, transfer, or auction.
3.Warranty service may be refused if the product has been modified or repaired by the customer.
4.The company is not liable for direct or indirect damages resulting from product failure or use.
5.The company is not liable for any loss, corruption, or damage of data or programs.
6.This product is not intended for medical, life-support, nuclear, aerospace, transportation, or other high-reliability systems.
7.Repair shipping and delivery costs are the customer's responsibility.
8.This warranty certificate will not be reissued. Please keep it in a safe place.
9.This warranty is valid only in Japan.

Contact Information Sunnylove Technology Company Limited
3F, Shin-Osaka Building, 1-1-36 Nishiawaji
Higashiyodogawa-ku, Osaka 533-0031, Japan
www.novaplus.co.jp
Email | support.jp@novaplus-tech.com
TEL | 06-6795-9951
Hours: Weekdays 10:00–17:00 (excl. weekends & holidays)